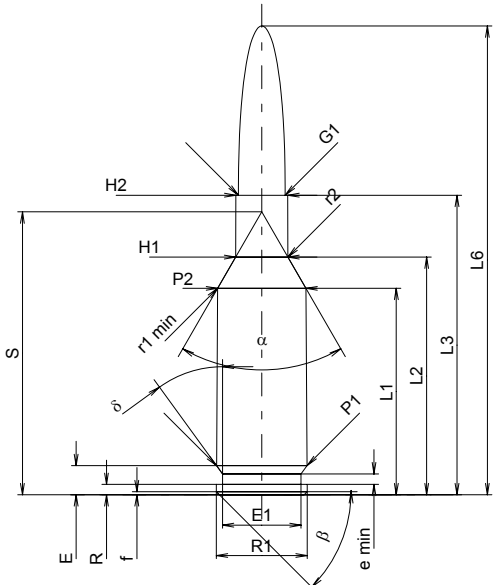
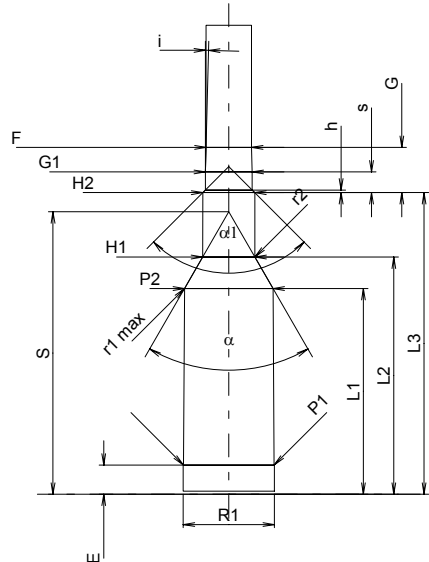


C.I.P.	6mm BR Norma	TAB.	I
		Date	95-12-20
		Revision	02-05-15
Country of Origin: SE			
	CARTRIDGE MAXI Lengths L1 ¹⁾ = 27.30 -0.20 L2 ¹⁾ = 31.44 -0.20 L3 ¹⁾ = 39.62 L4 = L5 = L6 = 62.00 Case Head R = 1.37 R1 = 12.01 R3 = E = 3.85 E1 = 10.39 e min = 1.40 δ = 36° f = 0.40 β = 45° Powder Chamber P1 = 11.96 P2 ¹⁾ * = 11.68 -0.20 Junction Cone α [*] = 60° S [*] = 37.42 r1 min = 0.64 r2 = 1.50 Collar H1 [*] = 6.90 H2 ¹⁾ = 6.87 Projectile G1 ¹⁾ = 6.18 G2 = F = L3+G ¹⁾ = 45.61 Pressures (Energies) Method Transducer Pmax = 4050 bar PK = 4658 bar PE = 5060 bar M = 17.50 EE = 2545 Joule Miscellaneous Dimensions Fe ¹⁾ = 0.10 delta L =	CHAMBER MINI Lengths L1 = 27.20 L2 = 31.36 L3 ¹⁾ = 39.88 Breech R = R1 = 12.04 R2 = R3 = r = Powder Chamber E = 3.85 P1 ¹⁾ = 11.99 P2 [*] = 11.71 Junction Cone α ¹⁾ * = 60° S [*] = 37.34 r1 max = 0.64 r2 = 1.91 Collar H1 [*] = 6.91 H2 ¹⁾ = 6.88 Commencement of Rifling G1 ¹⁾ * = 6.19 G ¹⁾ = 5.98 α1 = 90° h = 0.35 s [*] = 2.74 i ¹⁾ * = 1°30' w = Barrel F ¹⁾ * = 6.02 Z ¹⁾ = 6.17 Grooves b = 2.29 N = 6 u = 203.20 Q = 29.52 mm ²	
			
Scale 1:1			
Dimensions in << mm >> Dimensions and Tolerances for Proof Barrels see Appendix CR 1.		Notes: 1) Check for safety reasons * Basic dimensions	