



## 6.5 Creedmoor with 90 gr TNT® HP



Max Case Length:	1.920"
Trim-to Length:	1.910"
Max Cart. OAL:	2.825"
RCBS Shell Holder:	#3
Test Firearm:	Universal Receiver
Barrel Length:	24"

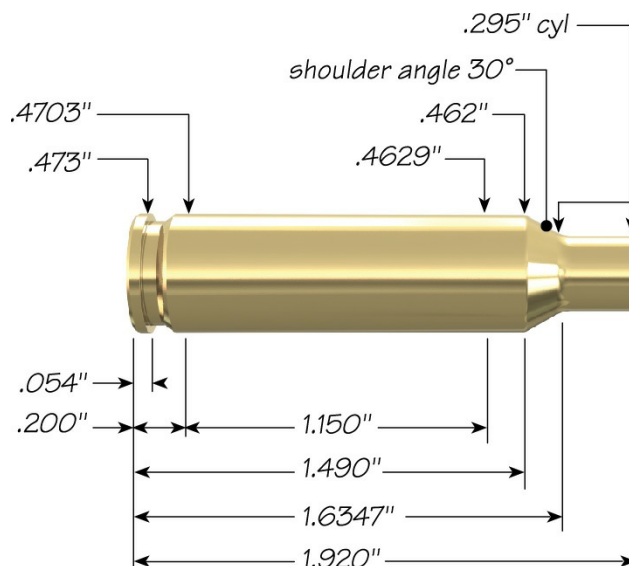

6.5mm	Speer Part No.	Weight, grains	COAL Tested	Ballistic Coefficient	Sectional Density
 <b>90 gr TNT® HP</b>	1445	90	2.700	.184	.281

Propellant	Cartridge Case	Primer	START CHARGE		MAXIMUM CHARGE	
			Grain	Velocity (ft/sec)	Grain	Velocity (ft/sec)
Accurate 2700		CCI 200	45.0	3087	<b>50.0</b>	3490
Alliant AR-Comp		CCI 200	38.5	3027	<b>42.8</b>	3389
Alliant Power Pro 2000-MR		CCI 200	44.7	3120	<b>49.7</b>	3506
Alliant Power Pro Varmint		CCI 200	41.0	3105	<b>45.5</b>	3449
Alliant Reloder 15		CCI 200	41.7	3107	<b>46.3</b>	3444
Alliant Reloder 17		CCI 200	45.3	3128	<b>50.0C</b>	3499
Hodgdon H380		CCI 200	45.1	3108	<b>49.0C</b>	3381
Hodgdon H414		CCI 200	45.0	3070	<b>50.0</b>	3460
Hodgdon Varget		CCI 200	40.4	3088	<b>44.9</b>	3430
IMR 4064		CCI 200	40.0	3095	<b>44.4</b>	3444

		START CHARGE		MAXIMUM CHARGE	
Vhtavuori N140	CCI 200	39.9	3016	<b>44.3</b>	3359
Lab Notes					

**[speer-ammo.com](http://speer-ammo.com)**